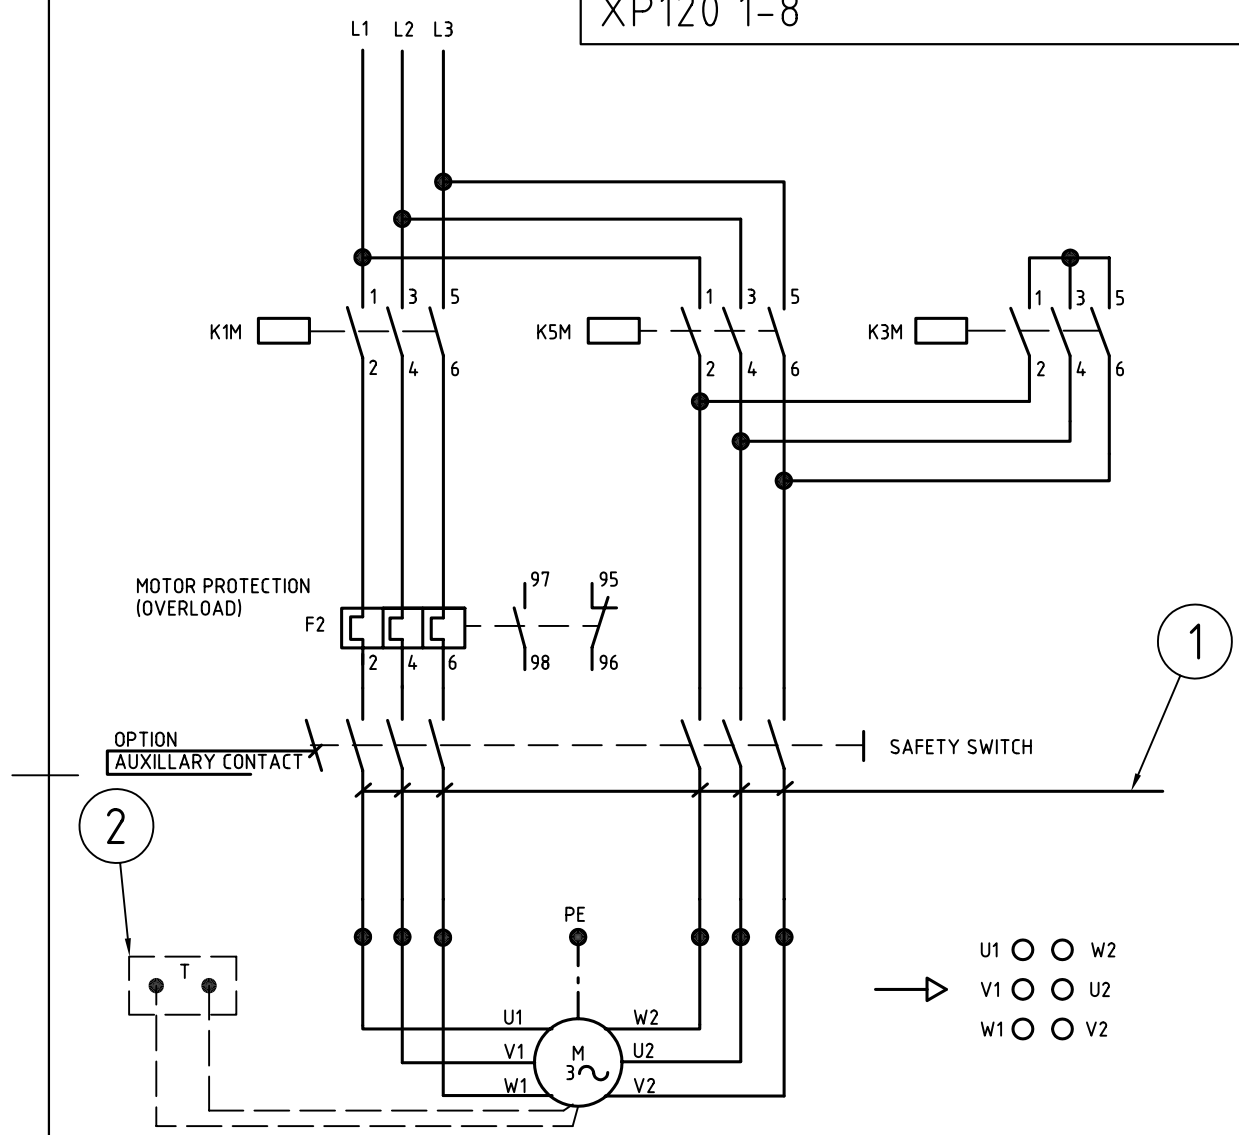




MODEL INFO: Speed B Y/D-Start
DXP120 1-15
XP120 1-8



WITH ELECTRICAL FUSE AND MOTOR PROTECTION RELAY:
 × FUSE SIZE ACCORDING TO LABEL ON MOTOR PROTECTION RELAY F2.
 × NORMAL OPERATION: RELAY CURRENT = MOTOR RATED CURRENT x 0,58

POS	DESCRIPTION	COMMENT
1	STANDARD	7G1,5
2	OPTION	THERMO PROTECTION with thermal contact

29-0006/	DET./ARTIKEL-NUMMER	MOTOR WIRING DIAGRAM		 ASARUMS INDUSTRI AB	
	Denna handling är AIA:s egendom och får ej utan AIA:s skriftliga medgivande kopieras, delges tredje person eller användas för annat obehörigt ändamål		RITAD LN KONTR. GODK. TE	DAT. 950202 SIGN. SIGN.	 TILLHÖR RITN. SKALA 1:1 RITN. NR 29-0006-A4